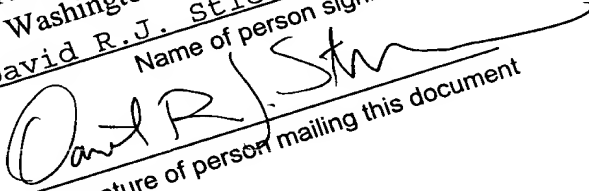


EXPRESS MAIL CERTIFICATE

The undersigned hereby certifies that this document is
being deposited with the United States Postal Service
today
by the "Express Mail" service, utilizing Express Mail
label number **August 17, 2001,**
EL 055 848 017 US
addressed to:

Assistant Commissioner for Patents,
Washington, D.C. 20231.

David R.J. Stienon, Reg. No. 33212
Name of person signing


Signature of person mailing this document

TITLE OF THE INVENTION

Device for Use in Connection with a Fabric in a Paper Machine

CROSS REFERENCES TO RELATED APPLICATIONS

5 [0001] This application is a continuation of PCT/FI00/00115, filed February 16,
2000, and claims priority on Finnish Application No. 990343, filed February 18,
1999, the disclosures of both of which applications are incorporated by reference
herein.

**STATEMENT AS TO RIGHTS TO INVENTIONS MADE UNDER
FEDERALLY SPONSORED RESEARCH AND DEVELOPMENT**

10 **BACKGROUND OF THE INVENTION**

[0002] As known in the prior art, in connection with the wet end fabrics of a paper
machine, for example, in guiding, spreading and cleaning of a felt in a press section,
a separate device is used for each purpose, at least one of each of them being
arranged for said purpose in connection with each fabric. In the arrangements known
15 in the state of the art, the devices used for these purposes are an automatic guide, a
manual guide, a guide roll, a curved spreader roll, suction units and jets. Such

separate devices cause extra costs, they take space and require support structures in connection with the frame structures of the machine.

[0003] One problem with the suction units used in connection with the separate devices known in the prior art has been that the width of the suction slot has not
5 always been adjustable so that several suction units may have been needed for each felt.

[0004] One problem in connection with suction units has also been that the suction unit rubs against the felt so that the press section consumes more power.

[0005] In the arrangements known in the state of the art, in fast machines in
10 particular, the felt has worn quickly, which has been partly due to the rubbing of the ceramic covers of felt suction units. Rolls and mechanical impurities also wear felts.

[0006] The spreader rolls in the arrangements known in the prior art have had a constant curvature, and thus it has not been possible to adjust their spreading effect.

SUMMARY OF THE INVENTION

[0007] An object of the invention is to provide a device in which the above-noted
15 problems with the prior art devices are not encountered.

[0008] An object of the invention is also to provide a device which is of low cost.

[0009] One further non-indispensable object of the invention is also to disclose a device in which the width of the suction slot in the suction unit is adjustable.

[0010] One further non-indispensable object of the invention is also to disclose a
20 device in which the curvature of the spreader roll can be adjusted.

[0011] In accordance with the invention, the device comprises device components

that accomplish at least two of the following functions: guiding, spreading and/or cleaning of a fabric. An advantageous embodiment example of the invention comprises the above-mentioned functions, all in the same device.

5 [0012] The device according to the invention thus comprises in accordance with an advantageous embodiment an automatic guide, a guide roll, a curved spreader roll and a suction unit in a single device assembly. Jets may also be incorporated in the device assembly.

two
separate

10 [0013] In accordance with an advantageous additional feature of the invention, instead of prior known ceramic ribs, suction ribs that can be bent, for example, plastic ribs or equivalent are used as suction ribs of the suction slot of the suction unit, which is possible because the fabric is supported by rollers in the device. The adjustment of plastic ribs for regulating the width of the suction slot is easy to carry out and, when needed, the suction width can be increased, for example, at the edges with respect to the centre because the plastic rib is easy to bend.

15 [0014] Advantageously, in accordance with an additional feature of the device according to the invention, the journalling of the rollers (the guide roll and the spreader roll are formed of rollers) is accomplished by means of bearings lubricated with circulating grease or circulating oil or by means of permanently lubricated bearings, and the device can be turned upside down by using a hydraulic motor or
20 cylinder for the purpose of cleaning. Advantageously, the end seals of the suction slot in the suction unit of the device are accomplished, for example, by means of adjustable overlapping joints. The suction pipe system of the suction unit is laid from both the driving side and the tending side, thus achieving a good and uniform suction effect.

25 [0015] The functions of the curved spreader roll are provided by placing the rollers forming the spreader roll in a form which is suitably curved. In a press section, the deflections of tubular rolls can be compensated for, for example, by placing the

rollers at the edges of the machine at different heights using, for example, spacer plates under the bearing housings.

[0016] In felt guidance, the manual guide of the prior art arrangements has been omitted and the automatic guide is most preferably accomplished as a mechanical guide comprising linear guides and a worm gear, whereby the problems of known devices are avoided. The automatic guide is provided with such a movement length that no separate manual guide is needed. The movement length is, for example, 140 mm. In connection with the device in accordance with the invention, as a measuring head is advantageously used a non-contacting sensor or a contacting measuring transducer, i.e. a felt and wire tracking device.

[0017] The invention provides substantial savings in costs as the space requirement and the complexity of the device assembly are reduced. When used on fast machines, the service life of the fabric increases if the wear of the felt loop constitutes the main reason for replacement of the felt. The other main reasons for replacement of the felt include, for example, hardening, clogging, contamination or a scheduled shutdown.

[0018] Only one device according to the invention is needed for each fabric because the width of the suction slot of the suction unit part can be adjusted, which allows optimization to be accomplished for each individual felt.

[0019] The power consumption of the press is reduced because the suction unit is less rubbing and fewer rolls are used than in the prior art arrangements since separate guide rolls and spreader rolls are no longer needed as they have been formed of rollers in connection with the device.

[0020] Curvature, i.e the power of spreading, can be regulated, in which connection the spreading effect can be regulated, and automatic control is self-retaining owing to a trapezoid-thread screw used in accordance with an

advantageous example. It is easy to add automation to the device according to the invention, for example, controls and their automation can be readily incorporated, which increases the means of affecting the felt loop, for example, the profiling of the moisture of the felt by adjusting the width of the suction slot.

5 [0021] In the following, the invention will be described in more detail with reference to the figures of the accompanying drawing, to the details of which the invention is, however, not by any means intended to be narrowly confined.

BRIEF DESCRIPTION OF THE DRAWINGS

10 [0022] Figure 1 schematically depicts one advantageous embodiment of the device according to the invention when viewed from the end.

[0023] Figure 2 schematically depicts the device illustrated in Fig. 1 when viewed in the longitudinal direction.

[0024] Figure 3 depicts some possible applications of the device according to the invention for use in connection with press felts of a press section.

15 [0025] Figure 4 schematically depicts one advantageous modification of the embodiment illustrated in Figs. 1 and 2 when viewed from the end.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0026] The advantageous embodiment example of the invention shown in Figs. 1 and 2 comprises a suction unit part 19 which comprises a suction chamber 16
20 connected to the driving and tending sides by means of suction pipes 11 (tending side) and 18 (driving side). An adjustable suction slot 15 is formed between bendable suction ribs, preferably plastic ribs 13 and 14, a fabric F being passed to run over said suction slot 15 in a direction S. A spreader roll 30 which is adjustable in its curvature has been placed before the suction ribs 13, 14 in the running
25 direction of the fabric F, which spreader roll is formed of rollers 31 between which

adjustable bearing housings 32 have been placed, said bearing housings enabling the set of rollers formed by the rollers 31, i.e. the spreader roll 30, to be made curved. A guide roll 40 made up of rollers 41 and bearing means 42 therebetween has been placed on the outlet side of the suction slot 15. An automatic guide 20 comprises linear guides 22 and a worm gear 23 as well as a movement base 21 and advantageously a trapezoid-thread screw 24. Doctor boxes of the device 10 have been denoted with the reference numeral 17 and end seals of the suction slot 15 with the reference numeral 12. The end seals 12 may be, for example, adjustable seals based on an overlapping joint. The suction ribs 13, 14 are adjustable in position and bendable for adjusting the suction slot 15.

[0027] The device in accordance with the invention thus comprises according to the advantageous embodiment shown in Figs. 1 and 2 an automatic guide 20, a guide roll 40, a curved spreader roll 30 and a suction unit 19 as a single device assembly. The adjustment of the suction unit part 19 and the suction ribs 13, 14 in order to adjust the width of the suction slot 15 is easy to accomplish, for example, by increasing the suction width at the edges with respect to the centre because the suction ribs 13, 14 can be bent to a desired position. Advantageously, the journalling arrangements of the rollers 41, 31 in the guide roll 40 and in the spreader roll 30 have been accomplished by means of bearings lubricated with circulating grease or circulating oil or by means of permanently lubricated bearings. The rollers 31, 41 can be placed at different heights at the edges of the machine by using, for example, spacer plates under the bearing housings. The device 10 can be turned upside down by using a hydraulic motor or cylinder (not shown) for the purpose of cleaning.

[0028] Fig. 3 shows a schematic application of a press section 50 in which devices 10 according to the invention have been placed in connection with fabrics F; 51, 52, 53, 54. The press section 50 illustrated in the figure comprises two press nips N1, N2 formed between press rolls 55, 56 and 57, 58, respectively. The guide rolls of the fabrics have been denoted with the reference numeral 59 and rolls which comprise a suction slot have been denoted with the reference numeral 61. A roll 60

adjustable in position is situated at the beginning of the press section in connection with a suction roll 61, a paper web being passed between said rolls from a former.

[0029] In the schematic modification of Fig. 4 of the embodiment shown in Figs. 1 and 2, the position of the suction ribs 13, 14 is advantageously curved with respect to the fabric. In that connection, the fabric does not run straight but drawn into a curve, in which connection its friction is lowest. In other respects, the illustration of Fig. 4 corresponds to the embodiment shown in Figs. 1 and 2. In Fig. 4, the parts corresponding to those of Figs. 1 and 2 have been denoted with the same reference numerals.

[0030] A felt and wire tracking device is advantageously used in connection with the device according to the invention, said device being based on an angle sensor and on a flap lying against the edge of the felt as well as on a measuring head, in which the flap of the measuring head lying against the edge of the felt remains in contact with the edge of the felt by means of a compression spring placed inside an oil-containing cylinder, the structure of the return mechanism of said spring resembling the structure of a conventional shock absorber. Oil or an equivalent medium flows through a piston from holes making the movement of the flap more stable, and the return force is adjustable. Two measuring heads are used for each fabric, and the signal is filtered. An angle sensor of strong construction is used as the angle sensor of the measuring head, which withstands the amounts required for longitudinal and radial load, and the measuring member constructed inside its transducer is a non-wearing capacitive transducer operating without a mechanical contact. A sensor can be used both in the measuring head and as a position sensor of the guide, in which connection the adapting of output and input impulses is easy.

[0031] Above, the invention has been described only with reference to one of its advantageous embodiment examples, to the details of which the invention is not intended by any means to be narrowly confined. Many variations and modifications are feasible within the scope of the inventive idea defined in the following claims.